
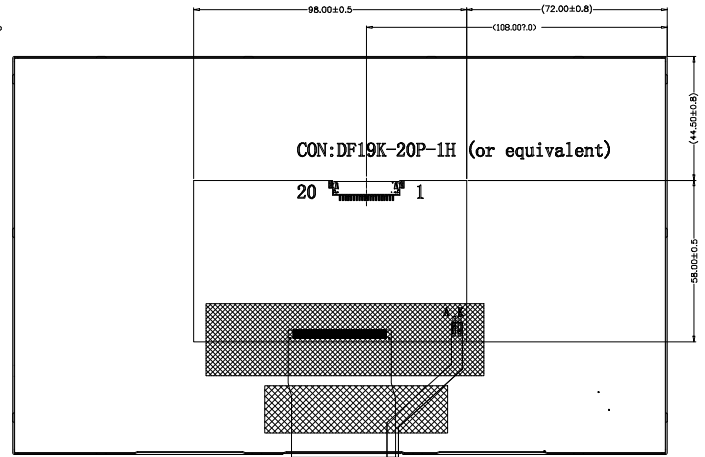
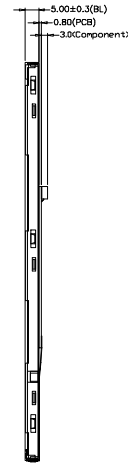


由 Autodesk 教育版产品制作

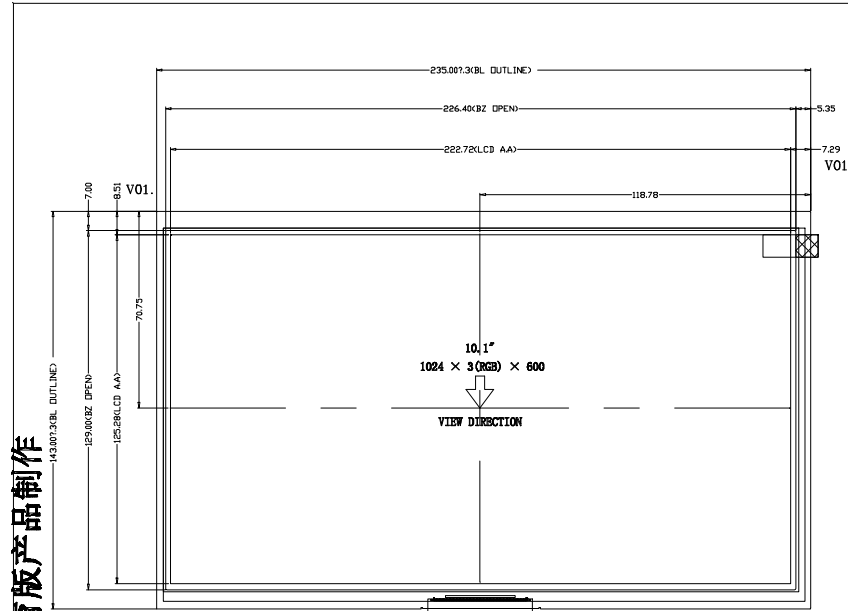

PIN DESCRIPTION


Pin	Symbol
1	VCC
2	VCC
3	VSS
4	VSS
5	RINO-
6	RINO+
7	VSS
8	RINI-
9	RINI+
10	VSS
11	RIN2-
12	RIN2+
13	VSS
14	RCLK-
15	RCLK+
16	VSS
17	VDD_5V
18	VDD_5V
19	ADJ
20	VSS

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

NOTES:

1. GENERAL TOLERANCE:  $\pm 0.2$
2. ( ) REFERENCE DIMENSION
3. REFERENCED DIMENSION: ( )
4. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS



Display Type	TFT
Optimum Viewing Direction	NORMALLY WHITE, TRANSMISSIVE
Upper Polarizer Type	12 O'CLOCK
LCD Driver IC	Anti-Glare
Logic Voltage	HX8282+HX8696
Operation Temperature	VCC=3.3V, VDD=5V
Storage Temperature	-20°C TO 70°C
Interface	-30°C TO 80°C
Backlight	LVDS interface
Surface luminance	36-LED WHITE 240MA/16.8~20.4V
White X/Y	1000cd/m2

					DRAWN		TITLE	DRAWING NO.			
					ME.CHECKED		MODULE SPEC.	COG-TA10MB1XH-16			
					EE.CHECKED			UNIT	mm	SCALE	FIT
					APPROVED			3rd Angle		SHEET 1 OF 1	
V00.		First issue		2019.09.20A	CUSTOMER'S APPROVAL		FANGSENG ELECTRONIC CO., LTD.				
VER. SYMBOL		AMENDMENT	SIGN	DATE							

由 Autodesk 教育版产品制作